

Product catalogue
burmatex[®]






We are passionate about making our flooring products and aim to create truly inspirational environments for people to enjoy



burmatex® offers an expansive product range; our traditional fibre bonded sheet and tile ranges include entrance products and ground-breaking structure bonded ranges, which present an expansive colour palette. Our multilevel loop, low level loop, textured loop and cut pile tufted carpet tile ranges, including a specialist entrance barrier product, are inspired by the latest and predicted future design and colour trends.



burmatex® is committed to best environmental practice in our manufacturing, from the sourcing of raw materials - including recycled content - minimising and reprocessing waste, use of green electricity and recycled packaging. Because of this, the Building Research Establishment (BRE) has awarded our products the highest BREEAM ratings; mostly A+.

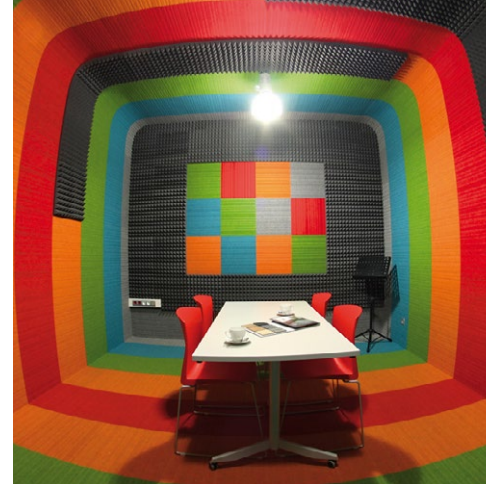

We hope that by reading our catalogue and visiting our website at www.burmatex.co.uk, we will inspire you to work with us to create really unique, captivating floor designs.

burmatex® is a leading UK manufacturer of contract carpets and carpet tiles. We are passionate about creating truly inspirational environments, reflected in our products unique nature across both design and manufacture.

Our products are suitable for use in heavy contract markets and used in a wide variety of private and public sector buildings, including schools, offices, universities and leisure centres.




The **burmatex**® design team are a driving force in developing product ranges which reflect colour and design trends as well as creating exclusive, bespoke carpet tiles to meet customers' needs and providing our free planned flooring layout design service.



burmatex® is a BS EN ISO 9001:2000 registered company (Cert No.FM1440). All products are tested to BSI/CEN standards in relation to durability, wear, flame retardancy, antistatic properties and colour fastness.



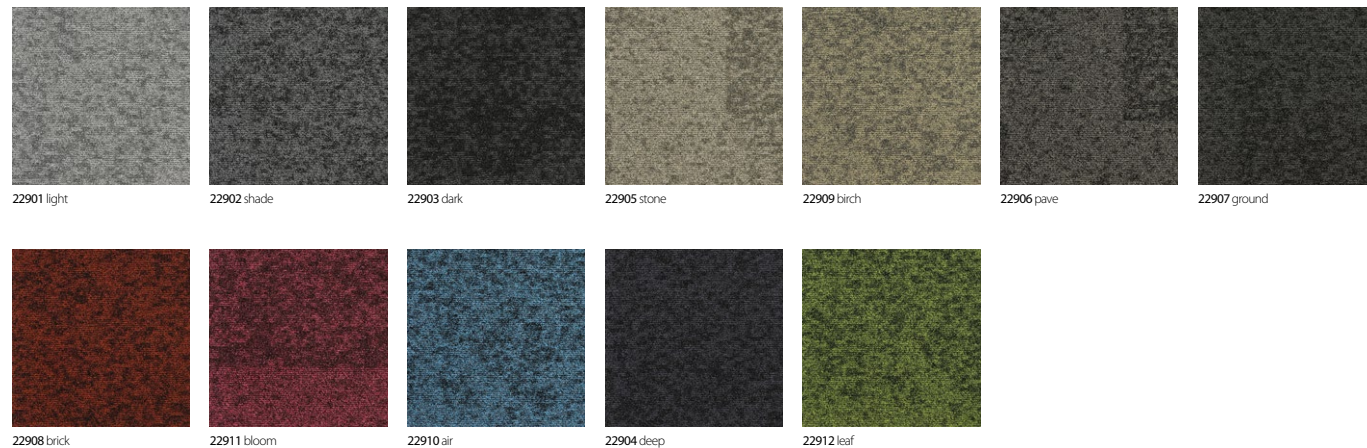

Specification

- Product Description:** Multilevel Loop
- Pile Yarn Description:** 100% Solution Dyed Aquafil Econyl® Nylon (Polyamide-PA)
- Tile Dimensions:** 50 cm x 50 cm
- Pile Height:** 5 mm +/-10%
- Total Thickness:** 7.5 mm +/-10%
- Pile Weight:** 910 g/m²
- Tufts per m²:** 236,220 g/m²
- Castor Chair Rating:** BS EN 985 Pass
- Body Voltage Test:** BS ISO 6356:2000 <2kV
- Colour Fastness To Light:** Minimum grade 6
- Flammability:** Euroclass Bfl-s1



rainfall

rainfall's inspiration was trying to capture those first moments of a summer storm. The first spots of rain punctuate the surface, gathering in intensity until the whole colour is several shades darker.

This multilevel loop product encompasses changes of tone in varying proportions throughout, resulting in an all over effect of subtlety combined with soft angles.

These characteristics ensure that each installation of appears slightly different from the last. An enticing palette of 12 colours provides bright and light options, through to more concentrated and atmospheric tones, suitable for all manner of installations and interiors.



22801 haiku 22802 sesame 22803 sumi 22809 mochi 22805 arashi 22806 yari 22810 matcha



22808 inkpot 22807 fuji 22811 orchid 22812 sakura 22804 lantern

Specification

- Product Description:** Multilevel Loop
- Pile Yarn Description:** 100% Solution Dyed Nylon (Polyamide-PA)
- Tile Dimensions:** 50 cm x 50 cm
- Pile Height:** 5 mm +/-10%
- Total Thickness:** 7.5 mm +/-10%
- Pile Weight:** 795 g/m²
- Tufts per m²:** 226,771 g/m²
- Castor Chair Rating:** BS EN 985 Pass
- Body Voltage Test:** BS ISO 6356:2000 <2kV
- Colour Fastness To Light:** Minimum grade 6
- Flammability:** Euroclass Bfl-s1



osaka

inspired by clashes in Japanese culture; new and old, warm and cool, urban and natural - **osaka** is a collection of contrasts that work seamlessly together.

The design's pattern (originally from a map of Osaka) can be interpreted in a multitude of ways; geometric and inspired by the traditional practise of origami, or organic and reminiscent of a bamboo forest floor.

The abstract nature of the design, teamed with a diverse colour palette, allows it to be both soft and strong, expertly working with any modern interior space.



22201 ice 22202 ridge 22203 point 22204 north 22205 moose 22206 anchor 22207 creek



22208 lake 22209 husky 22210 wolf 22211 spruce 22212 valley

Specification

- Product Description:** Multilevel Loop
- Pile Yarn Description:** 100% Solution Dyed Aquafil Econyl® Nylon (Polyamide-PA)
- Tile Dimensions:** 50 cm x 50 cm
- Pile Height:** 5 mm +/-10%
- Total Thickness:** 7.5 mm +/-10%
- Pile Weight:** 800 g/m²
- Tufts per m²:** 226,771 g/m²
- Castor Chair Rating:** BS EN 985 Pass
- Body Voltage Test:** BS ISO 6356:2000 <2kV
- Colour Fastness To Light:** Minimum grade 6
- Flammability:** Euroclass Bfl-s1



alaska


alaska is our first multilevel loop product and its name was also our inspiration.

A concise palette of twelve colours in this 800g product, combined with the tactile and textural finish, all relate to the invigorating outdoors of this beautiful state. This enables the creation of nature-inspired flooring schemes, while not excluding the possibility of a more classic effect.


Used alone, or in combination with other burmatex ranges such as **grade**, **axis** and **hadron**, **alaska** brings an additional layer of flexibility and creativity to our constantly evolving product portfolio.



21601 titanium 21615 ash 21603 sparkler 21616 arctic 21610 clay 21604 firefly 21608 moss

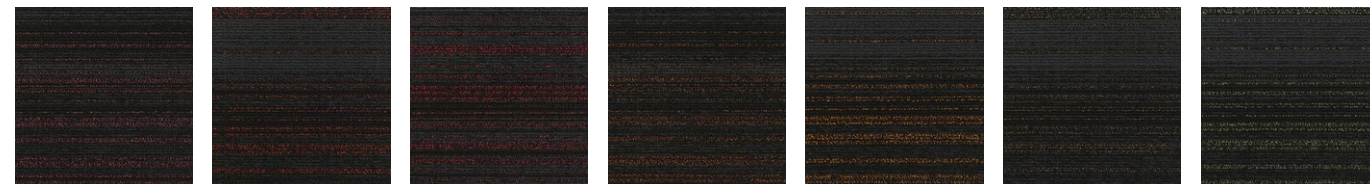


21607 flamingo 21605 crimson 21612 raspberry 21613 rust 21606 papaya 21611 starling 21609 mint

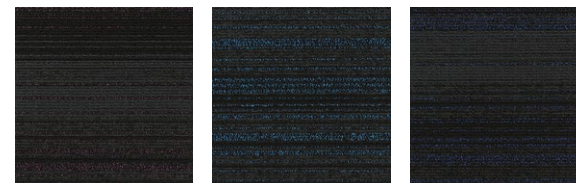

21614 violet 21602 cerulean 21617 electric

Specification

- Product Description:** Textured Loop Pile
- Pile Yarn Description:** 100% Solution Dyed Nylon 6.6 (Polyamide-PA)
- Tile Dimensions:** 50 cm x 50 cm
- Pile Height:** 3.5 mm +/-10%
- Total Thickness:** 6.5 mm +/-10%
- Pile Weight:** 800 g/m²
- Tufts per m²:** 177,165 g/m²
- Castor Chair Rating:** BS EN 985 Pass
- Body Voltage Test:** BS ISO 6356:2000 <2kV
- Colour Fastness To Light:** Minimum grade 6
- Flammability:** Euroclass Bfl-s1



hadron

hadron is highly inspired by striking imagery of the hadron collider. Hyper-real bright bursts of colour, surround by dark space. Each colour-way from the collection has the same neutral, dark grey base, making it easy to delineate areas without harsh lines and creating seamless transitions across a floor. A variety of highlight colours are used, from intense pops of colour to mid tones, neutrals and semi-darks. The inclusion of texture on this carpet tile, in a subtle weft style pattern, enhances the dispersed nature of the colours.




17415 cyan 5 17315 cyan 10 17215 cyan 60 17416 marina 5 17316 marina 10 17216 marina 60 17405 lime 5



17305 lime 10 17205 lime 60 17408 night 5 17308 night 10 17208 night 60 17403 orange 5 17303 orange 10




17203 orange 60 17413 magenta 5 17313 magenta 10 17213 magenta 60 17402 scarlet 5 17302 scarlet 10 17202 scarlet 60

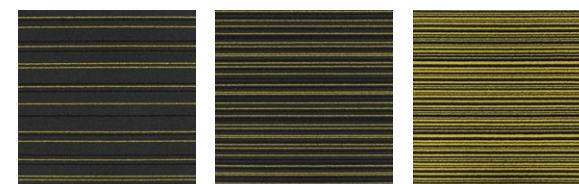

17414 canary 5 17314 canary 10 17214 canary 60

Specification

- Product Description:** Textured Loop Pile
- Pile Yarn Description:** 100% Solution Dyed Nylon
- Tile Dimensions:** 50 cm x 50 cm
- Pile Height:** 4.5 mm +/-10%
- Total Thickness:** 7.0 mm +/-10%
- Pile Weight:** 680 g/m²
- Tufts per m²:** 180.976 g/m²
- Castor Chair Rating:** BS EN 985 Pass
- Body Voltage Test:** BS ISO 6356:2000 <2kV
- Colour Fastness To Light:** Minimum grade 6
- Flammability:** Euroclass Bfl-s1




strands

strands is a vibrant and exciting 100% Nylon textured loop carpet tile range offering almost limitless opportunities for floor design.

Each tile starts with a background colour of mid grey with a black pinstripe and is then accented by one of eight striking key note colour stripes in three versions: - Strands 5; Strands 10 and Strands 60; so named because the key note colour stripe takes up 5%, 10% and 60% of the carpet tile respectively.

Strands offers the designer combinations of pattern and colour to create and develop unique floor designs starting from tessellated or brick in 5, 10 or 60 up to amazing effects such as random monolithic, brick repeat, chequerboard using combinations of 5, 10 and 60. Schemes can be further enhanced using combinations of other burmatex ranges.




22101 frost




22103 wren




22104 mist




22102 sky




22105 blueprint



22106 fern



22109 orb




22108 jelly



22107 fuschia



22111 robin



22110 amber

Specification

Product Description: Textured Loop Pile

Pile Yarn Description: 100% Solution Dyed Aquafil Econyl Nylon (Polyamide-PA)

Tile Dimensions: 50 cm x 50 cm

Pile Height: 3.5 mm +/-10%

Total Thickness: 6.0 mm +/-10%

Pile Weight: 550 g/m²

Tufts per m²: 177,165 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1



axis

axis is inspired by our surroundings; nature, art, food, and culture. Strong and bold, or rich and calm, the palette of eleven colours provides the axis for many different flooring schemes. Create a vibrant punch of colour, a calm oasis, or use in combination with other burmatex ranges such as **hadron**, **grade** or **strands**.

The relationship with **strands** is unique, in that all the colours in the strands palette now have a corresponding axis colour.


Each of the colours has been designed to be installed single direction – no need to quarter turn – with an inherent dark fleck to provide extra appearance retention without compromising the impact of the product.




19802 blue tin




19805 burnished copper



19801 galvanised steel



19806 green nickel



19804 permanganate



19803 warmed lead

Specification

Product Description: Textured Loop Pile

Pile Yarn Description: 100% Solution Dyed & Space Dyed Nylon (Polyamide-PA)

Tile Dimensions: 50 cm x 50 cm

Total Thickness: 5 mm +/-10%

Pile Weight: 620 g/m²

Tufts per m²: 235.800 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1



tandem

m is a high performance tile class 33, central to the design collection; this simply styled tile presents six colours from a natural palette which can be laid both monolithically and quarter turn suiting small and large spaces.

tandem works individually and alongside other ranges to complement and enhance a design colour; with a textured effect and enduring finish this gentle design effortlessly complements various finishes and furnishings.




21801 jet black


Specification

- Product Description:** Low Level Loop
- Pile Yarn Description:** 100% Solution Dyed Nylon (Polyamide-PA)
- Tile Dimensions:** 50 cm x 50 cm
- Pile Height:** 3.0 mm +/-10%
- Total Thickness:** 5.5 mm +/-10%
- Pile Weight:** 470 g/m² +/-10%
- Tufts per m²:** 196,850 g/m² +/-10%
- Castor Chair Rating:** BS EN 985 Pass
- Body Voltage Test:** BS ISO 63562:2000 <2kV
- Colour Fastness To Light:** Minimum grade 6
- Flammability:** Euroclass Bfl-s1

go to




go to stripe




go to

go to offers two designs – plain and stripe in a popular colour palette of fifteen. Brighter and darker greys and blues are supported with red and green brights within the collection. Each colour except jet black has its own counterpart in the stripe design. You can mix and match the plain and stripe options to create more interesting floor layouts or define zones.


The range maintains the level of high performance and resilience that **burmatex**® carpet tiles are known for. **go to** is the perfect choice for users that are looking for a quick and easy carpet installation option.



32701 south beach



32702 palm springs




32703 ocean drive




32705 turtle bay




32704 havana town




32710 icelandic isle




32711 nordic fjord




32708 bergen city



32712 polar drift



32707 baffin island



32713 galapagos bay



32706 bora bora

Specification

Product Description: Low Level Loop

Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)

Tile Dimensions: 50 cm x 50 cm, 25 cm x 100 cm

Pile Height: 4 mm +/-10%

Total Thickness: 6.5 mm +/-10%

Pile Weight: 600 g/m²



Tufts per m²: 196500 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV


Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1




tivoli mist tile/plank

tivoli presents a high performance loop pile (class 33) product offering, made with 100% solution dyed nylon and including **tivoli**, **tivoli online** and **tivoli multiline**.

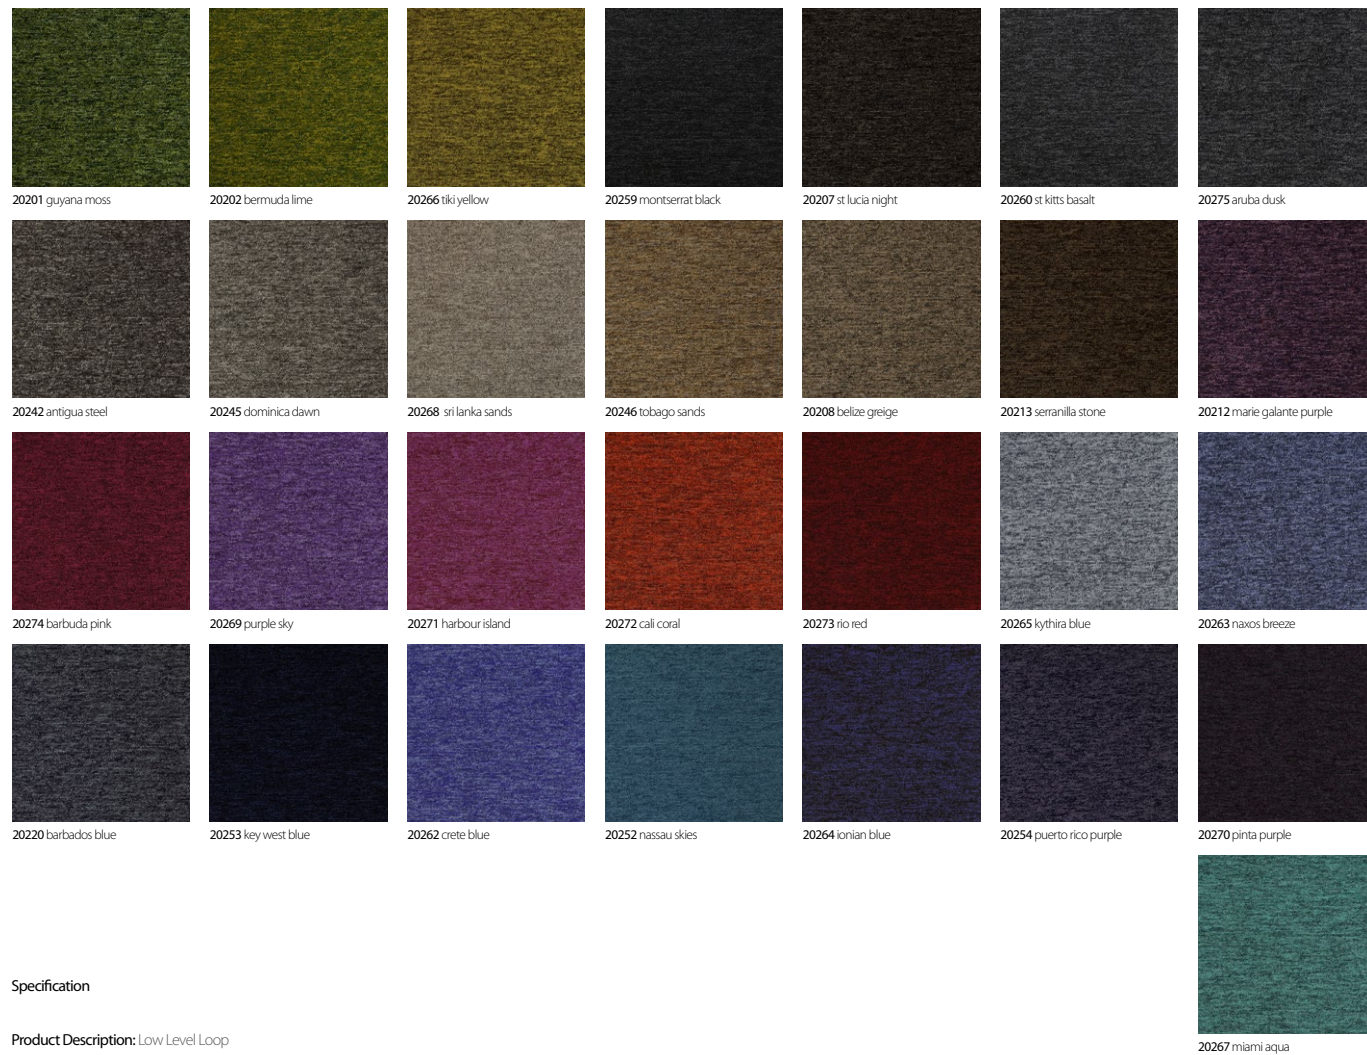

Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 4 mm +/-10%
Total Thickness: 6.5 mm +/-10%
Pile Weight: 600 g/m²
Tufts per m²: 196.500 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



tivoli tile (2019)

tivoli presents a high performance loop pile (class 33) product offering, made with 100% solution dyed nylon and including **tivoli**, **tivoli online** and **tivoli multiline**.




online
20607 aegean sea



online
20608 haiti haze



online
20609 perissa sand



multiline
20703 melanesia grey



multiline
20707 tenerife black



multiline
20711 seychelles beige




multiline
20709 mediterranean topaz




multiline
20708 santorini blue



multiline
20712 cayman purple



multiline
20713 takutea red



multiline
20710 everglade green

Specification

Product Description: Low Level Loop

Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)

Tile Dimensions: 50 cm x 50 cm

Pile Height: 4 mm +/-10%

Total Thickness: 6.5 mm +/-10%

Pile Weight: 600 g/m²

Tufts per m²: 196,500 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1



tivoli tile 2019 (cont.)


Varied plain, **tivoli**, classic pinstripe, **tivoli online** and contemporary striped, **tivoli multiline**, designs can be used individually or in a bespoke arrangement, with the expansive, modern colour palette enabling classic, neutral schemes or innovative, creative layouts.




21101 guyana moss 21102 bermuda lime 21166 tiki yellow 21159 montserrat black 21160 st kitts basalt 21107 st lucia night 21175 aruba dusk



21142 antigua steel 21145 dominica dawn 21168 sri lanka sands 21108 belize greige 21165 lythira blue 21163 navos breeze 21120 barbados blue

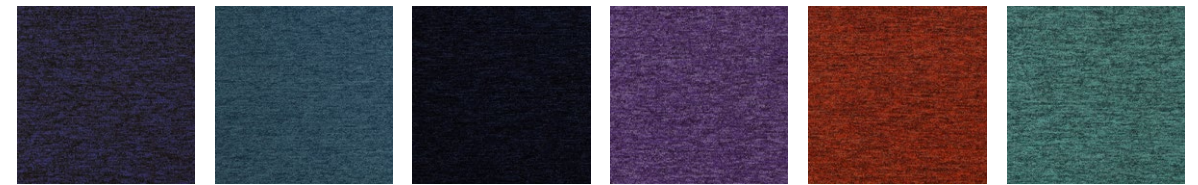

21164 ionian blue 21152 nassau skies 21153 key west blue 21169 purple sky 21172 cali coral 21167 miami aqua

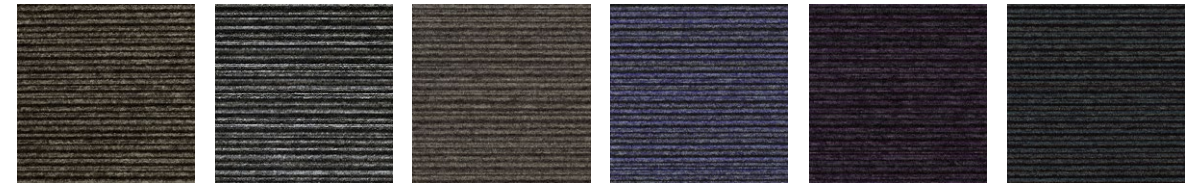

multiline 20703 melanesia grey multiline 20707 tenerife black multiline 21211 seychelles beige multiline 21208 santorini blue multiline 21212 cayman purple multiline 21209 mediterranean topaz

Specification

- Product Description:** Low Level Loop
- Pile Yarn Description:** 100% Solution Dyed Nylon (Polyamide-PA)
- Tile Dimensions:** 25 cm x 100 cm
- Pile Height:** 4 mm +/-10%
- Total Thickness:** 6.5 mm +/-10%
- Pile Weight:** 600 g/m²
- Tufts per m²:** 196500 g/m²
- Castor Chair Rating:** BS EN 985 Pass
- Body Voltage Test:** BS ISO 6356:2000 <2kV
- Colour Fastness To Light:** Minimum grade 6
- Flammability:** Euroclass Bfl-s1



tivoli plank 2019

tivoli carpet planks offer two loop pile designs – a solid colour **tivoli** and a stripe **tivoli multiline**. The colour selection creates a broad palette with complementary colours across the two designs developing creative installation options.

tivoli carpet planks are made with 100% solution dyed nylon and are suitable for heavy commercial use (class 33).



20223 nevis blue



20203 caicos azure



20211 barthelemy green



20204 tortola gold



20205 bahamas- orange



20210 bellamy red



20249 martinique-maroon



20206 green turtle



20230 grenada grey



20225 saona sage



20209 trinidad sea



20214 st martin sands



20258 panama brown



multiline
20702 pacific green




multiline
20704 polynesia beige



multiline
20701 ibiza blue



multiline
20705 mauritius mauve



multiline
20706 nion terracotta



online
20604 sardinian coral



online
20602 cyclades jade



online
20603 tahitian pearl



online
20606 baltic amber



online
20605 pamarzi earth



online
20601 atlantic cobalt

Specification

Product Description: Low Level Loop

Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)

Tile Dimensions: 50 cm x 50 cm

Pile Height: 4 mm +/-10%

Total Thickness: 6.5 mm +/-10%

Pile Weight: 600 g/m²

Tufts per m²: 196.500 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1




tivoli tile

Varied plain, **tivoli**, classic pinstripe, **tivoli online** and contemporary striped, **tivoli multiline**, designs can be used individually or in a bespoke arrangement, with the expansive, modern colour palette enabling classic, neutral schemes or innovative, creative layouts.




21114 st martin sands



21103 caicos azure



21111 barthelemy green



21106 green turtle



21104 tortola gold




21105 bahamas orange



21110 bellamy red




21149 martinique maroon




multiline
21201 ibiza blue



multiline
21205 mauritius mauve



multiline
21206 reunion terracotta



multiline
21202 pacific green



multiline
21204 polynesia beige

Specification

Product Description: Low Level Loop

Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)

Tile Dimensions: 25 cm x 100 cm

Pile Height: 4 mm +/-10%

Total Thickness: 6.5 mm +/-10%

Pile Weight: 600 g/m²

Tufts per m²: 196500 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1



tivoli plank


tivoli carpet planks offer two loop pile designs – a solid colour **tivoli** and a stripe **tivoli multiline**. The colour selection creates a broad palette with complementary colours across the two designs developing creative installation options.

tivoli carpet planks are made with 100% solution dyed nylon and are suitable for heavy commercial use (class 33).



Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Nylon (Polyamide PA) Space Dyed & Recycled Solution Dyed
Tile Dimensions: 50 cm x 50 cm
Pile Height: 4.8 mm +/-10%
Total Thickness: 7.3 mm +/-10%
Pile Weight: 550 g/m²
Tufts per m²: 196,500 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



infinity

infinity offers 2 designs – **infinity** and **infinity stitch** in a large well balanced palette of 30 colours.

Both the classic flecked design of **infinity** and the unique directional organic pattern of **infinity stitch** are ideal for various type of interiors like large open-plan office spaces, smaller individual offices, corridors, reception areas or public buildings.



denim
■ 21502 ■ 22502




indigo
■ 21503 ■ 22503



purple
■ 21506 ■ 22506




ruby
■ 21504 ■ 22504



silver
■ 21501 ■ 22501



zinc
■ 21508 ■ 22508



smoke
■ 21509 ■ 22509





crater
■ 21505 ■ 22505



abyss
■ 21507 ■ 22507

Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm, 25 cm x 100 cm
Pile Height: 3.5 mm +/-10%
Total Thickness: 6.0 mm +/-10%
Pile Weight: 620 g/m² +/-10%
Tufts per m²: 235,800 g/m² +/-10%
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 63562:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



grade tile & plank

The name **grade** links to the graduation between lighter tones and darker ones within each colour option. A researched and considered palette of nine colours gives great flexibility and longevity, whether using a single selection or creating your own combinations. Colours can subtly diffuse from one to another, or create drama by using blocks of contrasted areas



51435 fudge



51436 timber



51405 honey



51410 charcoal



51401 slate



51402 flint



51433 moonlight



51412 deep sea




51434 dumulus



51403 midnight



51432 atmosphere



51413 crystal



51418 delft




51411 ocean



51407 everglade



51406 spice



51437 poppy



51438 sandstone

Specification

Product Description: Low Level Loop

Pile Yarn Description: 100% Solution Dyed Nylon

Tile Dimensions: 50 cm x 50 cm

Pile Height: 4.5 mm +/-10%

Total Thickness: 7.0 mm +/-10%

Pile Weight: 550 g/m²

Tufts per m²: 176,850 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1



balance



balance is a 100% solution dyed nylon level loop pile carpet tile, ideal for commercial, education and public sector projects. **balance's** 18 colourways have been inspired by an eclectic global palette which work equally well when used subtly or boldly over large areas or as accents to define smaller floor spaces.



black
■21001 ■22001


Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm, 25 cm x 100 cm
Pile Height: 4.5 mm +/-10%
Total Thickness: 7.0 mm +/-10%
Pile Weight: 550 g/m²
Tufts per m²: 176,850 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 63562000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1

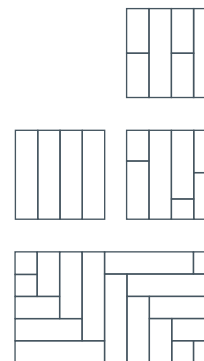

balance echo tile & plank


balance echo black is a dark, low level loop, carpet tile and plank design in 100% solution dyed nylon. With a combination of stripes and blocks this heavy contract (class 33), flexible design works in a mixture of installation styles. Able to be combined with both bright and neutral inserts, this multi-tile/multi-plank design enables the simple creation of an impressive installation.




19701 dark sepiá



19702 space dust




19703 pencil lead



19704 classic grey



19705 grey slate



19706 blackboard

Specification

Product Description: Low Level Loop

Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)

Tile Dimensions: 50 cm x 50 cm

Pile Height: 4.5 mm +/-10%

Total Thickness: 7.0 mm +/-10%

Pile Weight: 550 g/m²

Tufts per m²: 176.850 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 63562:2000 <2kV


Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1



balance stripe


balance stripe is a loop pile range in the Burmatex portfolio. Its timeless appearance combined with a classic and contemporary colour palette is perfect for offices, corporate buildings or commercial spaces. This BREEAM A+ rated collection can be easily combined with other Burmatex products from tufted, structured bonded and fibre bonded collections to create a unique scheme.

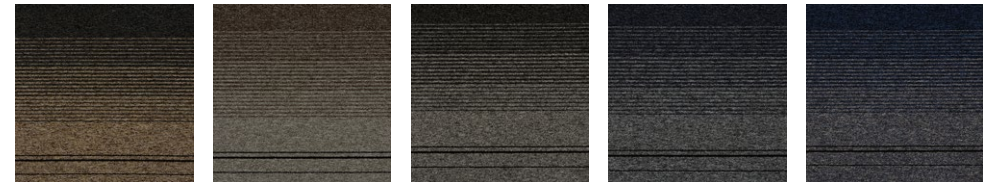

18804 earth 18805 rock 18801 storm 18803 cove 18802 marine




51436 timber 51441 cotton 51402 flint 51434 cumulus 51412 deep sea

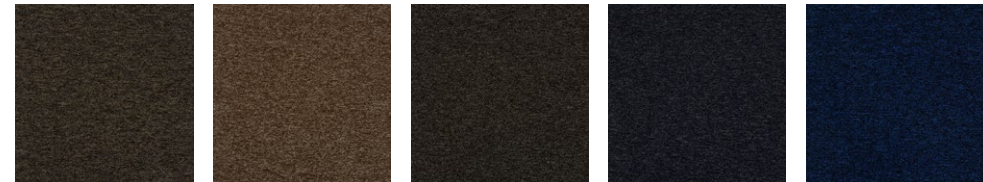

51440 soot 51435 fudge 51410 charcoal 51433 moonlight 51403 midnight

Specification

- Product Description:** Low Level Loop
- Pile Yarn Description:** 100% Solution Dyed Nylon (Polyamide-PA)
- Tile Dimensions:** 50 cm x 50 cm
- Pile Height:** 4.5 mm +/-10%
- Total Thickness:** 7.0 mm +/-10%
- Pile Weight:** 550 g/m²
- Tufts per m²:** 176,850 g/m²
- Castor Chair Rating:** BS EN 985 Pass
- Body Voltage Test:** BS ISO 6356:2000 <2kV
- Colour Fastness To Light:** Minimum grade 6
- Flammability:** Euroclass Bfl-s1



balance atomic

balance atomic is an exciting, contemporary loop pile, with a colour palette ranging from warm beiges, through greys, to cool blues. This BREEAM A+ rated collection comes in 3 co-ordinating designs; a plain, a pinstripe and a versatile, random effect, all of which work alone or complement each other perfectly to create a stylish, individual look for any interior.

balance atomic storm, marine, cove, earth and rock are multi tile designs. Each box of tiles contains a selection of these designs which can be laid monolithic, quarter turn or random to achieve the desired effect.



18501 grey

Specification

Product Description: Low Level Loop

Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)

Tile Dimensions: 50 cm x 50 cm

Pile Height: 4.5 mm +/-10%

Total Thickness: 7.0 mm +/-10%

Pile Weight: 550 g/m²

Tufts per m²: 176,850 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1



balance greyscale

balance greyscale is a new dark grey 'field' tile which co-ordinates beautifully with most products from burmatex, including the 8 vibrant colourways from Strands and the new stylish Balance Atomic range. This BREEAM A+ rated loop pile tile provides a subtle, plain contrast against striped or textured areas, for meeting or breakout areas in offices or other corporate buildings.



1834 soap stone



1891 pewter cloud



1805 diamond dust



1803 concrete jungle



1802 zinc asphalt



1801 carbon steel



1809 ink stone




1814 blue monday



1813 lavender oil



1890 purple emperor



1886 pink diamond




1812 indigo snake




1882 turquoise mountain




1883 emerald coast



1830 lime street



1887 gold quest



1839 mandarin duck



1845 scarlet runner

Specification

Product Description: Structure Bonded®

Pile Yarn Description: 85% Polypropylene 15% Nylon

Tile Dimensions: 50 cm x 50 cm

Total Thickness: 7.8 mm +/-10%


Pile Weight: 950 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1




structure bonded®

lateral®


lateral® is the definitive product offering for all commercial interiors, schools, public buildings, residential schemes and design and build projects. **lateral's** 'ground-breaking' design stems from our innovative, structure bonded manufacturing technology using an unusual mix of textures from cut through to loop pile. It is available in a range of 18 colours.



12812 quartz layer



12826 pewter cast



12830 diamond bolt



12806 steel cable



12828 suede ribbon




12829 black tar




12823 ink bar




12827 blue bay




12824 lavender star




12820 purple patch



12816 pink gin




12831 indigo run




12822 turquoise gem




12825 emerald green



12802 lime light



12818 gold finger



12801 sunset strip



12804 scarlet ribbon

Specification

Product Description: Structure Bonded®

Pile Yarn Description: 85% Polypropylene 15% Nylon

Tile Dimensions: 50 cm x 50 cm

Total Thickness: 8.0 mm +/-10%

Pile Weight: 1000 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6


Flammability: Euroclass Bfl-s1




zip

zip is the next generation in structure-bonded® design, evolving from the technology that created lateral®.


zip uses subtle texture and contrasting colour for a striking effect. Combine **zip** with code and lateral® to produce a unique floor design.



12912 cool stone



12926 pewter track



12930 diamond coal



12906 metal shock




12928 night suede




12929 pitch black



12923 ink film



12927 blue reef



12924 lavender seed




12920 deep purple




12916 pink panther




12931 indigo stack




12922 turquoise opal



12925 emerald city



12902 lime zest



12918 rolled gold



12901 sun burst



12904 scarlet fever

Specification

Product Description: Structure Bonded®

Pile Yarn Description: 85% Polypropylene 15% Nylon

Tile Dimensions: 50 cm x 50 cm

Total Thickness: 8.0 mm +/-10%

Pile Weight: 1000 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6


Flammability: Euroclass Bfl-s1



code

code is the next generation in structure-bonded® design, evolving from the technology that created lateral®.

code uses subtle contrasting stripes of colour and texture for a stylish defined look. Combine **code** with zip and lateral® to produce a unique floor design.



52026 shadow




52039 mocha



52040 taupe



52011 onyx



52009 pyrite



52025 galena




52028 night sky



52018 tanzanite



52001 blue john



52020 black opal



52014 flash fire



52016 turquoise



52008 tourmaline

Specification

Product Description: Cut Pile

Pile Yarn Description: 100% Solution Dyed Nylon

Tile Dimensions: 50 cm x 50 cm

Total Thickness: 8.0 mm +/-10%

Pile Weight: 850 g/m²

Tufts per m²: 157,480 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 63562000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1




origin


origin is a luxurious, contemporary cut pile carpet tile, comprising 13 shades which create a wonderful broadloom appearance when used in large scale or smaller breakout areas. Made from 100% Premium Branded Solution Dyed Nylon, it is suitable for boardrooms, reception areas and most commercial spaces.



2126 gramplan gold 2128 angus tan 2129 falkirk fawn 2110 berkshire black 2109 glamorgan grey 2111 wiltshire charcoal 2102 Devon Blue

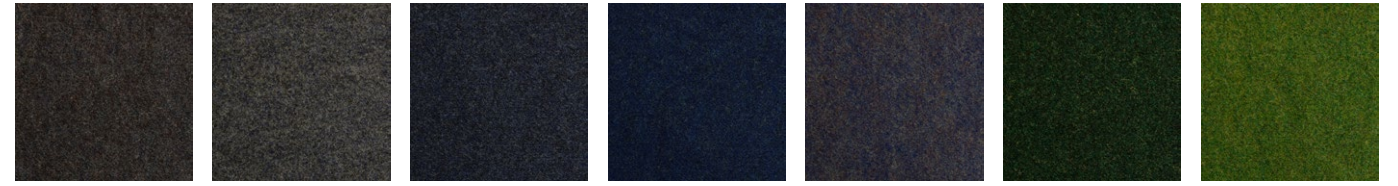

2104 hampshire slate 2107 surrey blue 2101 cornwall blue 2105 sussex sea 2106 kent mauve 2119 lancashire green 2118 Yorkshire Fern

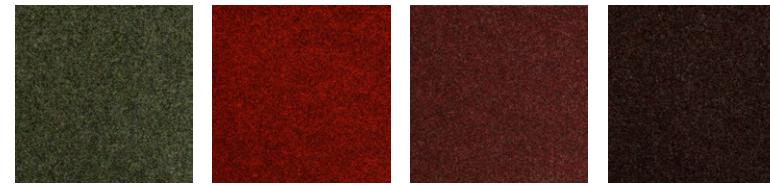

2117 cheshire jade 2115 norfolk sun 2114 shropshire maroon 2112 suffolk heather

Specification


- Product Description:** Fibre Bonded
- Pile Yarn Description:** 85% Polypropylene 15% Nylon
- Roll Length:** 30m
- Roll Width:** 2m
- Total Thickness:** 4.8 mm +/-10%
- Total Weight:** 915 g/m² +/-10%
- Castor Chair Rating:** BS EN 985 Pass
- Body Voltage Test:** BS ISO 6356:2000 <2kV
- Colour Fastness To Light:** Minimum grade 6
- Flammability:** Euroclass Cf1-s1

3230 classic

3230 classic is extremely durable fibre bonded carpet, perfectly suited for public buildings, such as schools and gyms and other commercial interiors. Made from a high performance mix of solution dyed fibres, it is available in a choice of 18 practical colourways.



Huddle area

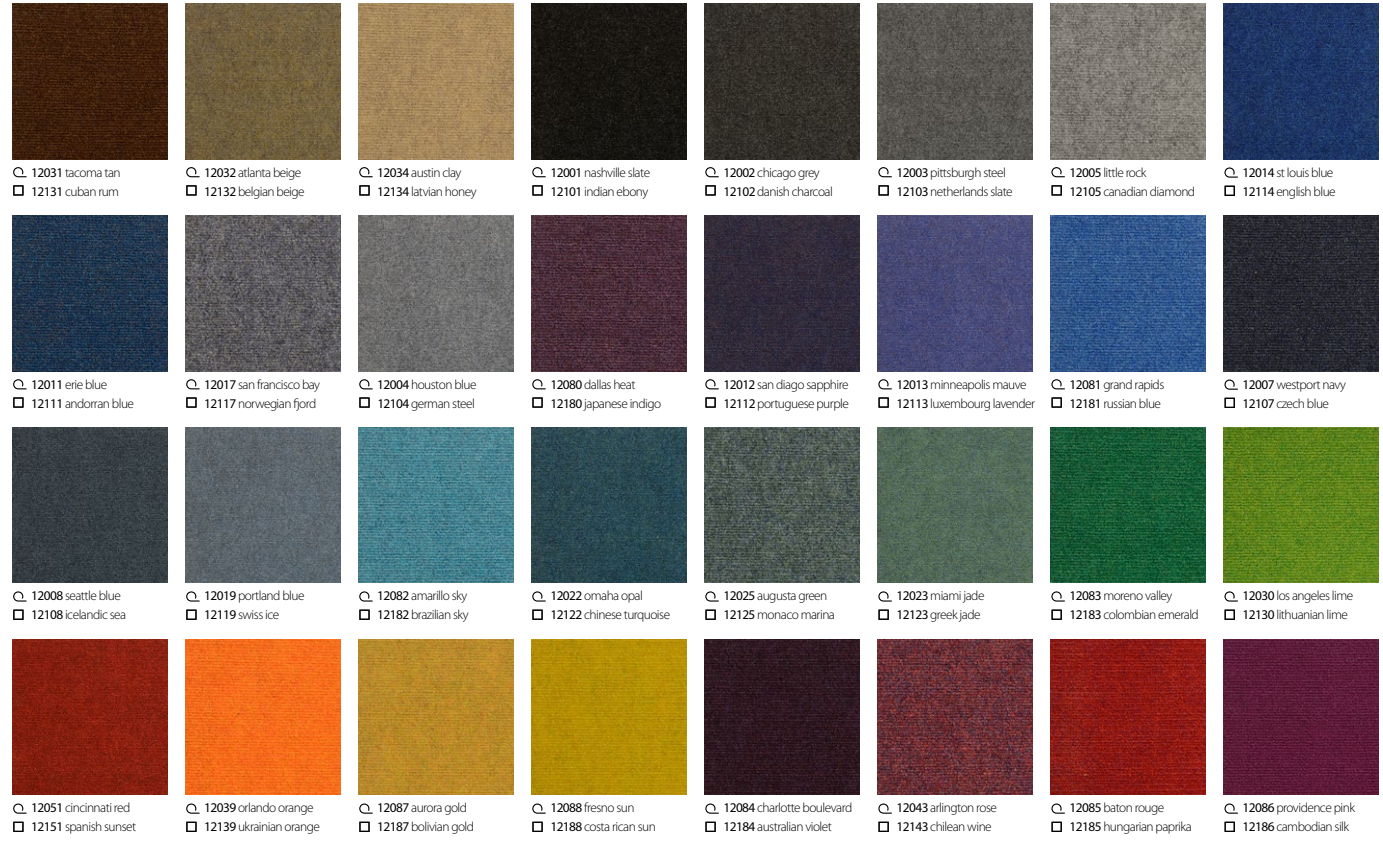

- roll 4200 sidewalk
- tile cordiale

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Roll Length: 30m
Roll Width: 2m
Total Thickness: 6.0 mm +/-10%
Total Weight: 950 g/m² +/-10%
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass EF-s1*

*200m2 minimum order quantity for Cf1-s1 rating

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 7.8 mm +/-10%
Pile Weight: 950 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1




4200 sidewalk

4200 sidewalk is an extremely durable fine ribbed fibre bonded carpet sheet. It is ideally suited for schools, public buildings and commercial offices. Made from a high performance mix of solution dyed fibres, it is available in a range of 32 vibrant colours.

cordiale

cordiale is an extremely durable fine ribbed fibre bonded carpet tile. It is ideally suited for schools, public buildings and commercial offices. Made from a high performance mix of solution dyed fibres, it is available in a range of 32 vibrant colours.

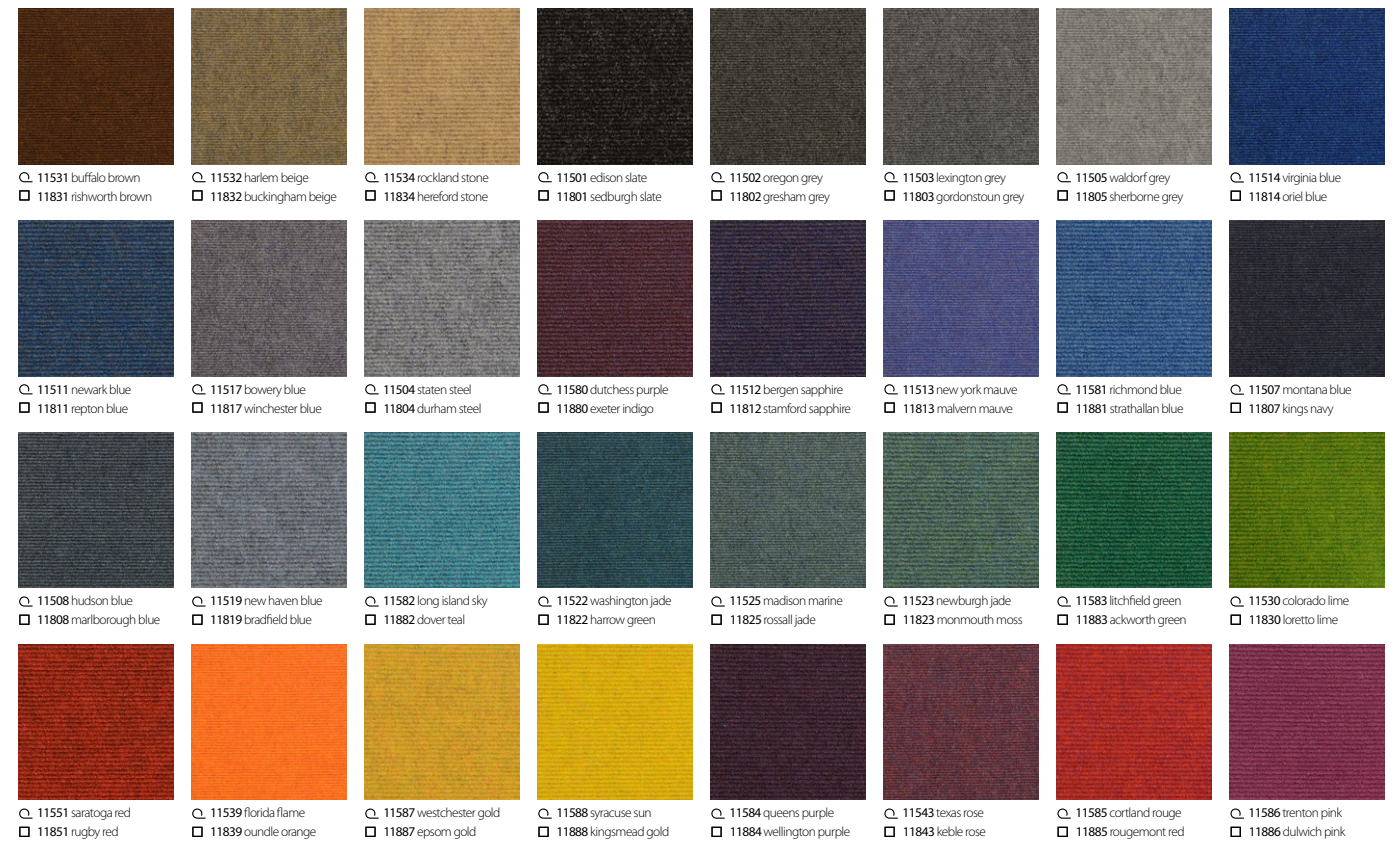

- roll 4200 sidewalk
- tile cordiale

Specification ●

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Roll Length: 30m
Roll Width: 2m
Total Thickness: 6.5 mm +/-10%
Total Weight: 975 g/m² +/-10%
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass EF-s1*

*200m2 minimum order quantity for Cfl-s1 rating

Specification □

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 7.8 mm +/-10%
Pile Weight: 975 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



4400 broadway

4400 broadway is an extremely durable broad ribbed fibre bonded carpet sheet and is particularly suited for public buildings, such as schools, and other commercial interiors. Made from a high performance mix of solution dyed fibres, it is available in a wide range of 32 exciting colourways.

academy

academy is an extremely durable broad ribbed fibre bonded carpet tile and is particularly suited for public buildings, such as schools, and other commercial interiors. Made from a high performance mix of solution dyed fibres, it is available in a wide range of 32 exciting colourways.




2670 black slate



2640 charcoal grey



2650 steel grey



2620 electric blue




2628 ocean blue



2656 summer sky




2642 teal green



2631 sea blue



2634 aqua



2666 deep indigo



2690 purple haze



2630 flame red

Specification

- Product Description:** Fibre Bonded
- Pile Yarn Description:** 100% Polypropylene
- Tile Dimensions:** 50 cm x 50 cm
- Total Thickness:** 7.8 mm +/-10%
- Pile Weight:** 1000 g/m²
- Body Voltage Test:** BS ISO 6356:2000 <2kV
- Colour Fastness To Light:** Minimum grade 6
- Flammability:** Euroclass Bfl-s1




rialto


rialto is an extremely durable heavy contract velour pile carpet tile. It is constructed from 100% polypropylene yarn and is ideally suited for public buildings, such as schools, and other commercial interiors. It is available in 12 colourways.



6070 yakama slate 6040 armenian grey 6050 norman steel 6023 iceni blue 6060 barona blue 6081 bavarian blue 6028 saxon blue

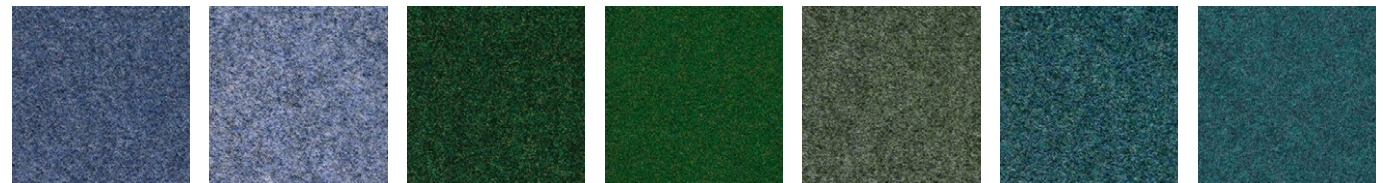

6056 spartan mauve 6061 skydancer 6036 phoenician green 6083 norse green 6045 trojan green 6055 dorian azure 6082 mayan sky

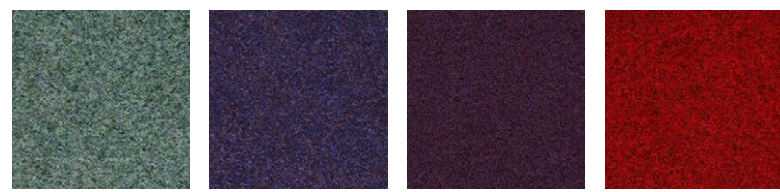

6022 assyrian jade 6066 navajo mauve 6090 persian purple 6062 red lake

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Roll Length: 30m
Roll Width: 2m
Total Thickness: 6.5 mm +/-10%
Total Weight: 1150 g/m² +/-10%
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass EF-s1

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 10 mm +/-10%
Pile Weight: 1200 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass BF-s1




5500 luxury


5500 is an extremely durable fibre bonded carpet sheet, ideally suited for public buildings, such as schools, and other commercial interiors. Made from a high performance mix of solution dyed fibres, it is available in a choice of 18 attractive colourways.

velour excel


velour excel is an extremely durable fibre bonded carpet tile, ideally suited for public buildings, such as schools, and other commercial interiors. Made from a high performance mix of solution dyed fibres, it is available in a choice of 18 attractive colourways.




18703 graphite block



18701 graphite




18702 graphite stripe



18706 sterling block



18704 sterling




18705 sterling stripe



18709 cobalt block



18707 cobalt



18708 cobalt stripe

Specification

Product Description: Performance Barrier System

Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)

Tile Dimensions: 50 cm x 50 cm

Total Thickness: 10.0 mm +/-10%

Pile Weight: 920 g/m²

Tufts per m²: 110,236 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2KV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1



armour

armour offers the ultimate in entrance performance with its combination of absorber and scraper yarns, which protect internal floor finishes by trapping up to 90% of dirt and moisture, tracked in by foot and wheel traffic. The combination of plain, stripe and block stripes in the key blending colours of dark grey, warm grey and blue, will coordinate beautifully with any flooring design scheme. Armour is ideal for primary and secondary entrance areas, as well as lobby, lift areas and staircases.



1440 grey 1428 blue 1439 brown 1446 fawn 1436 green

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 100% Polypropylene
Roll Length: 30m
Roll Width: 2m
Total Thickness: 10.0 mm +/-10%
Total Weight: 1490 g/m² +/-10%
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass EF-s1

7700 grimebuster

7700 grimebuster is a heavy contract ribbed fibre bonded carpet. It is ideal for withstanding heavy footfall environments and creating an effective dirt barrier for busy entrances, which lead directly from outside environments.



1640 newmarket grey 1628 haydock blue 1639 goodwood brown 1646 wincanton fawn 1636 curragh green

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 100% Polypropylene
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 12.0 mm +/-10%
Pile Weight: 1170 g/m²
Total Weight: 4300 g/m²
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass BF-s1



grimebuster 50

grimebuster 50 is a heavy contract fibre bonded carpet tile with a deep diagonal rib surface.

It is ideal for withstanding heavy footfall environments and creating an effective dirt barrier for busy entrances, which lead directly from outside environments.




7840 charcoal 7828 blue 7839 brown 7846 fawn 7836 green

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 100% Polypropylene
Roll Length: 30m
Roll Width: 2m
Total Thickness: 10.0 mm +/-10%
Total Weight: 1490 g/m² +/-10%
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass EF-s1

7800 chevrolay

7700 chevrolay is a heavy contract chevron ribbed fibre bonded carpet. It is ideal for withstanding heavy footfall environments and creating an effective dirt barrier for busy entrances, which lead directly from outside environments.

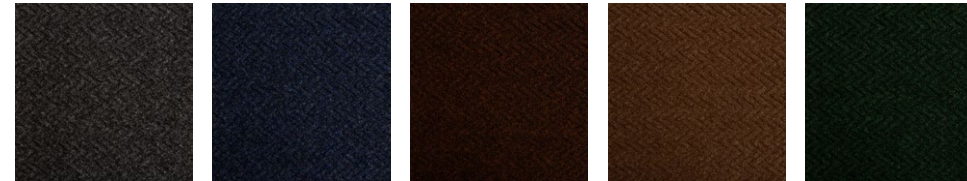

6240 alpha grey 6228 beta blue 6239 theta brown 6246 kappa fawn 6236 gamma green

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 100% Polypropylene
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 12.0 mm +/-10%
Pile Weight: 1490 g/m²
Total Weight: 4300 g/m²
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass BF-s1



chevrolay 50

chevrolay 50 is a heavy contract chevron ribbed fibre bonded tile with deep chevron design.

It is ideal for withstanding heavy footfall environments and creating an effective dirt barrier for busy entrances, which lead directly from outside environments.

characteristics of the products

Name	Dimensions Rolls (R) / Tiles (T)	Product Type	Pile Description	Carpet Pile Weight g/m ²	Tile Total Weight g/m ²	Carpet Pile Height mm	Tile Total Thickness mm	Number of tufts x/m ²	Backing	Flammability EN13501	Impact Noise	Number of SKUs	Suitable for Underfloor Heating	Body Voltage kV	Wear Classification	Colour Fastness to Light BS EN ISO 105	Slip Resistant	Castor Chair EN985
Alaska	T 50cm x 50cm	Multilevel Loop	100% Econyl Nylon(PA)	800	4200	5	7.5	226,771	Accummen®	Bfl-S1	22 dB	12	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Rainfall	T 50cm x 50cm	Multilevel Loop	100% Econyl Nylon(PA)	910	4300	5	7.5	236,220	Accummen®	Bfl-S1	24 dB	12	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Osaka	T 50cm x 50cm	Multilevel Loop	100% Nylon 6.6 (PA)	795	4200	5	7.5	226,771	Accummen®	Bfl-S1	22 dB	12	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Hadron	T 50cm x 50cm	Textured Loop	100% Nylon 6.6 (PA)	800	4240	3.5	6.5	177,165	Accummen®	Bfl-S1	23 dB	17	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Strands	T 50cm x 50cm	Textured Loop	100% Nylon(PA)	680	4430	4.5	7	180,976	Accummen®	Bfl-S1	23 dB	24	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Axis	T 50cm x 50cm	Textured Loop	100% Econyl Nylon(PA)	550	4000	3.5	7	177,165	Accummen®	Bfl-S1	20 dB	11	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Tandem	T 50cm x 50cm	Textured Loop	100% Nylon(PA)	620	4100	3.15	5	235,800	Accummen®	Bfl-S1	20 dB	6	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Go To	T 50cm x 50cm	Level Loop	100% Nylon(PA)	470	3780	3.0	5.5	196,850	Accummen®	Bfl-S1	20 dB	15	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Tivoli	T 50cm x 50cm P 25 cm x 100 cm	Level Loop	100% Nylon(PA)	600	4050	4	6.5	196,500	Accummen®	Bfl-S1	23 dB	38	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Tivoli Mist	T 50cm x 50cm P 25 cm x 100 cm	Level Loop	100% Nylon(PA)	600	4050	4	6.5	196,500	Accummen®	Bfl-S1	23 dB	38	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Infinity	T 50cm x 50cm	Level Loop	100% Nylon(PA)	550	4000	4.8	7.3	196,500	Accummen®	Bfl-S1	28 dB	18	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Grade	T 50cm x 50cm P 25 cm x 100 cm	Level Loop	100% Nylon(PA)	620	4100	3.5	6	235,800	Accummen®	Bfl-S1	21dB	9	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Balance	T 50cm x 50cm	Level Loop	100% Nylon(PA)	550	4300	4.5	7	176,850	Accummen®	Bfl-S1	24 dB	18	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Balance Echo	T 50cm x 50cm P 25 cm x 100 cm	Level Loop	100% Nylon(PA)	550	4300	4.5	7	176,850	Accummen®	Bfl-S1	24 dB	18	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Balance Stripe	T 50cm x 50cm	Level Loop	100% Nylon(PA)	550	4300	4.5	7	176,850	Accummen®	Bfl-S1	24 dB	6	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Balance Atomic	T 50cm x 50cm	Level Loop	100% Nylon(PA)	550	4300	4.5	7	176,850	Accummen®	Bfl-S1	24 dB	20	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Balance Greyscale	T 50cm x 50cm	Level Loop	100% Nylon(PA)	550	4300	4.5	7	176,850	Accummen®	Bfl-S1	24 dB	1	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Lateral	T 50cm x 50cm	Structure Bonded	85%PP 15%PA	950	4200	5.5*	7.8	-	Accummen®	Bfl-S1	18 dB	18	Yes below 27°	<2.0	HC	>6	NPD	Pass
Zip	T 50cm x 50cm	Structure Bonded	85%PP 15%PA	1000	4250	5.5*	8	-	Accummen®	Bfl-S1	17 dB	11	Yes below 27°	<2.0	HC	>6	NPD	Pass
Code	T 50cm x 50cm	Structure Bonded	85%PP 15%PA	1000	4250	5.5*	8	-	Accummen®	Bfl-S1	17 dB	11	Yes below 27°	<2.0	HC	>6	NPD	Pass
Origin	T 50cm x 50cm	Cut Pile	100% Nylon(PA)	850	4300	5	8	157,480	Accummen®	Bfl-S1	23 dB	13	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
3230 Classic	R 2m x 30m	Fibre Bonded Sheet	85%PP 15%PA	915		4.8		-	Uniform	Cfl-S1	17 dB	18	Yes below 27°	<2.0	HC	>6	NPD	Pass
4200 Sidewalk	R 2m x 30m	Fibre Bonded Sheet	85%PP 15%PA	950		6		-	Uniform	Efl-S1	18 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
4200 SidewalkFR	R 2m x 30m	Fibre Bonded Sheet	85%PP 15%PA	950		6		-	Uniform	Cfl-S1	18 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
Cordiale	T 50cm x 50cm	Fibre Bonded Tile	85%PP 15%PA	950	4200	6	7.8	-	Accummen®	Bfl-S1	18 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
4400 Broadway	R 2m x 30m	Fibre Bonded Sheet	85%PP 15%PA	975		6.5		-	Uniform	Efl-S1	19 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
4400 BroadwayFR	R 2m x 30m	Fibre Bonded Sheet	85%PP 15%PA	975		6.5		-	Uniform	Cfl-S1	19 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
Academy	T 50cm x 50cm	Fibre Bonded Tile	85%PP 15%PA	975	4200	6.5	7.8	-	Accummen®	Bfl-S1	21 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
Rialto	T 50cm x 50cm	Fibre Bonded Tile	100%PP	1000	4450	6	7.8	-	Accummen®	Bfl-S1		12	Yes below 27°	<2.0	HC	>6	NPD	Pass
5500 Sheet	R 2m x 30m	Fibre Bonded Sheet	85%PP 15%PA	1150		6.5		-	Uniform	Efl-S1	21 dB	18	Yes below 27°	<2.0	HC	>6	NPD	Pass
Velour Excel	T 50cm x 50cm	Fibre Bonded Tile	85%PP 15%PA	1200	4900	8	10	-	Accummen®	Bfl-S1	21 dB	18	Yes below 27°	<2.0	HC	>6	NPD	Pass

entrance matting

Name	Dimensions Rolls (R) / Tiles (T)	Product Type	Pile Description	Carpet Pile Weight g/m ²	Total Weight g/m ²	Thickness mm	Backing	Flammability EN13501	Number of SKUs	Wear Classification	Colour Fastness to Light BS EN ISO 105	Slip Resistant
Armour	T 50cm x 50cm	Cut Pile	100%PA	920	4500	10	Accummen®	Bfl-S1	9	Class 33	>6	DS
7700 Grimebuster	R 2m x 30m	Fibre Bonded Sheet	100% PP		1490	10	Uniform	Efl-S1	5	HC	>6	NPD
Grimebuster 50	T 50cm x 50cm	Fibre Bonded Tile	100% PP	1490	4300	12	Accummen®	Bfl-S1	5	HC	>6	NPD
7800 Chevrolay	R 2m x 30m	Fibre Bonded Sheet	100% PP		1490	10	Uniform	Efl-S1	5	HC	>6	NPD
Chevrolay 50	T 50cm x 50cm	Fibre Bonded Tile	100% PP	1490	4300	12	Accummen®	Bfl-S1	5	HC	>6	NPD

Appendix

7	rainfall	47	balance greyscale
9	osaka	49	lateral
11	alaska	51	zip
13	hadron	53	code
15	strands	55	origin
17	axis	57	3230 classic
19	tandem	59	4200 sidewalk
21	go to	59	cordiale
23	tivoli mist	61	4400 broadway
25	tivoli tile 2019	61	academy
29	tivoli plank 2019	63	rialto
31	tivoli tile	65	5500 luxury
33	tivoli plank	65	velour excel
35	infinity	67	armour
37	grade	69	7700 grimebuster
39	balance	69	grimebuster 50
41	balance echo	71	7800 chevrolay
43	balance stripe	71	chevrolay 50
45	balance atomic		





ENVIRONMENT FRIENDLY CARPETS

burmatex®

Head Office

Victoria Mills, The Green
Ossett
West Yorkshire
WF5 0AN
United Kingdom

Tel: +44 (0) 1924 262525
Fax: +44 (0) 1924 280033
Email: projects@burmatex.co.uk
Web: www.burmatex.co.uk

International Enquires

international@burmatex.co.uk

Eastern Europe Office

Burmatex Sp. z o.o.
Andersia Business Centre
Plac Andersa 7
61-894 Poznań, Poland

Tel: + 48 61 668 3883
Mob: + 48 603 548 074
Mob: + 48 696 057 065
email: biuro@burmatex.pl

Plank installation methods

Monolithic



Half Drop



Random Drop



Herringbone



Tile installation methods

Quarter Turn



Monolithic



Random



Brick



Half Drop




Alternate rows rotated 180°



Alternate tiles rotated 180°



Large Quarter Turn



Parquet

